


CAMERAS 16MM PORTABLE

Kodak Recordak Portable Microfilmer – Model RP-2

- 16mm microfilmer combines compactness with portability.
- Weighs a mere 23 pounds.
- Removable film unit accepts one or two 100-foot rolls of 16mm microfilm.
- Fits into a handy accessory carrying case.

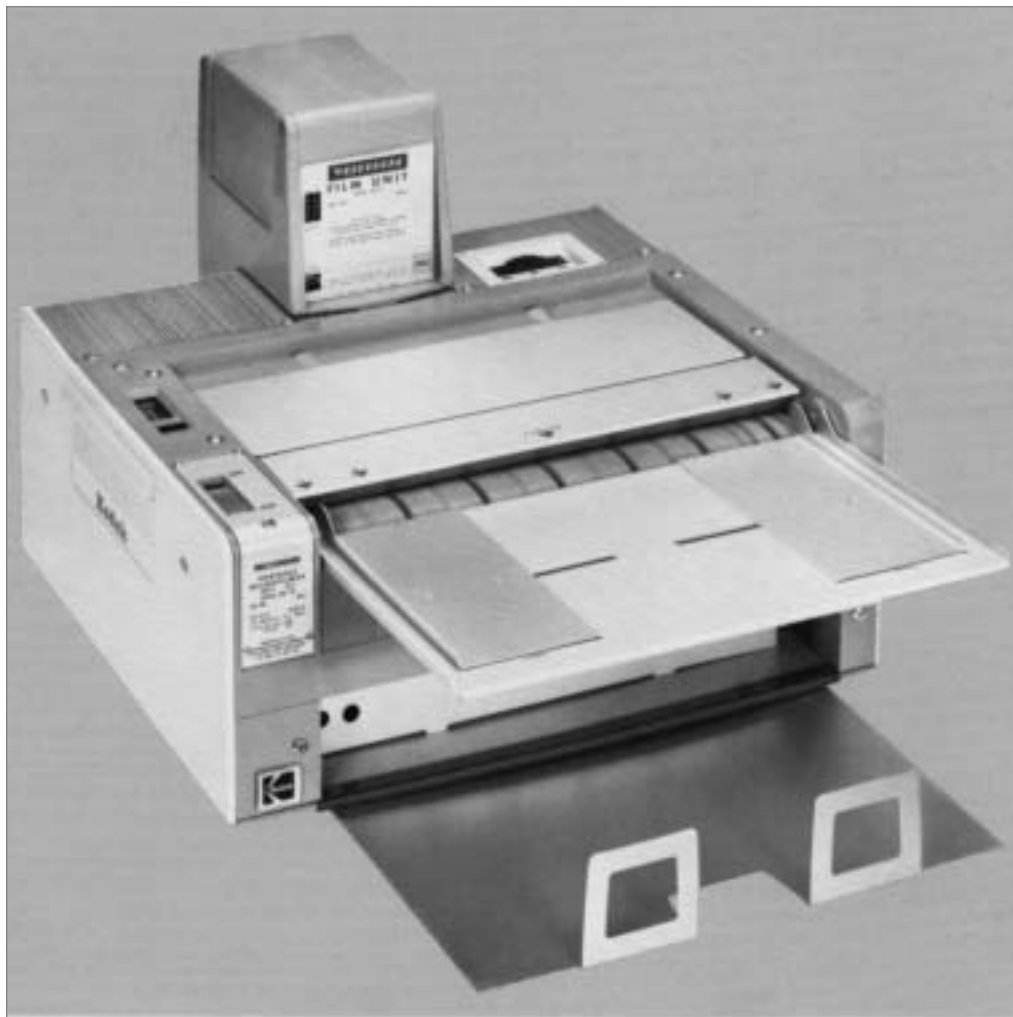

It offers you these features:

- Accommodates documents 12" (305mm) wide and of any length.
- Documents are fed into the microfilmer faceup and are returned facedown in their original sequence.
- Up to sixty letters or approximately 125 checks can be microfilmed in a minute.
- Simultaneous exposure of two rolls of film – one for immediate use, the other for auditing or security purposes.
- Easily transported between departments for separate microfilming of different types of records.
- One microfilmer can be used with different film units to keep records separate and for security restrictions.
- A document counter to record the number of documents microfilmed.
- Exposure control to adjust the illumination for differences in document quality, color, or line voltage variations.

Typical Machine Characteristics

Color: Light tan and cover beige.
 Reduction Ratio: 20:1.
 Document Size: Up to 12" (305mm) wide by any length.
 Film Capacity: One or two rolls of 16mm microfilm. Handles standard 100' (30.5m) lengths of film such as: Kodak Fine Grain Microfilm 1456 (Estar Base), 7456.
 Dimensions: 6½"H x 15½"W x 12½"D (165mm x 394mm x 318mm).
 Weight: 23 lbs. (10.4 kg).
 Power: 120 volts ± 10%, 50/60 Hz, ac only, 2.0 ampere. Underwriters' Laboratories, Inc. Listed, CSA approved.
 Controls and Signals:
 On-Off control.
 Spacing button.

An audible alarm sounds when film supply is near empty or if film unit is not properly positioned.
 Film in-motion indicator.
 Film footage indicator.
 The Microfilmer automatically stops if there is an exposure lamp failure.

Accessories:

Recordak Continuous Forms Accessory, Model FMT – facilitates microfilming fanfold trace recordings produced from fetal monitoring machines. It is easily attached and handles documents 6" wide up to 5' (152mm by 15.2m) in length.

Lightweight Carrying Case – stores the microfilmer, film unit, extra film, and spare lamps.

